

Ventless Hood Fry Kettle

Model CF 500-VH

The revolutionary Giles Ventless Hood Fry Kettle will keep your customers coming back for delicious fried chicken, tender vegetables and an array of flavorful delectables.

The Giles Ventless Hood Fry Kettle is the most advanced frying cooker available today. Now you can deep fry in areas that traditional hoods cannot accomodate, and maximize profits with minimum effort and expense.

The completely automatic "Auto-Basket Lift" on the fry kettle enables the operator to load the fryer, set the timer and activate the elevator cycle in one step. When the pre-set time for the frying cycle is complete, the basket automatically raises the finished product out of the shortening to avoid overcooking.

The fire supression system used in your Giles Ventless Hood is an Ansul R-102-A fire supression system. Final installation, charging and testing of the system is required to be performed by an authorized Ansul distributor. Our system contains piping, nozzles (appliance and plenum), and conduit for routing the fusible link cable through the hood.



Design Features



Ventless Hood System

The Ventless Hood consists of a built-in Fire Suppression and Air Purification System. The Air Filtration System operates in three steps:

- 1. Baffle filter traps large grease particles.
- 2. Precipitator consists of an ionizer that charges particles of dirty air allowing them to be collected by an electrostatic force.
- 3. Charcoal filter helps eliminate odor.



Automatic Oil Filtration System

Designed to complete a filter cycle within five minutes, the Automatic Oil Filtration System allows the operator to wash, rinse, drain and filter the oil in one motion. Refill is automatic and will increase the life of your shortening.

Accessories

Discharge hose, 5 filter papers, pot brush, kettle drain brush, stir paddle, crumb shovel and manual.












Giles Foodservice Equipment A Division of Giles Enterprises, Inc.

P.O. Box 210247 • 2750 Gunter Park Drive West • Montgomery, AL 36121-0247 USA 334.272.1457 • Fax 334.272.3561 • Phone Toll Free 1.800.554.4537

Web Site: www.gilesent.com • Email: info@gilesent.com

Ventless Hood Fry Kettle

Model CF-500-VH

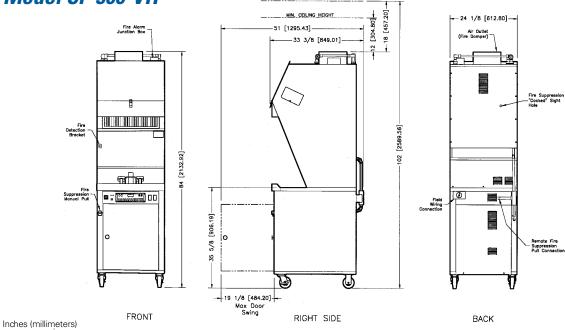

Legend

Construction:

Polished Stainless Steel Cabinet & Frypot Incoloy Tubular Sheath heating element

Dimensions:

Width: 24 1/8" 613 mm Depth: 34 7/8" 885 mm Height: 84" 2133 mm Min. ceiling height: 96" 2439 mm

Capacity:

Shortening Capacity: 45 lbs. (20.5 kg) Production: 14-16 lb. chicken (6.4 - 7.3 kg)

Cooking Computer:

8 Menu Items

190 - 350°F High Limit Thermostat: 425°F 220°C

We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements additions or replacements or previously purchased equipment.

32821-C

Electrical Specifications:

208/240V - 15,000 WATTS 1 phase - 208/240V - 74/64 AMPS 3 phase 208/240V - 44/38 AMPS No service cord provided

UL listed, NSF listed, CSA listed, UL Canada listed. CE

Product Number:

CF-500-VH

Miscellaneous:*

Complies with NFPA '96, BOCA 94-34, SBCCI 9416J, ICBO 5148, LA 8110, Exhaust Fan CFM- 510-680.

How To Specify

- Specify as model CF-500-VH
- 2. Specify voltage (208/240V).
- 3. Specify cycles (50 or 60).
- 4. Specify phase (1 or 3) (Delta or Wye).
- Specify additional fry baskets (P#70325)*.
- Specify extra Electronic Air Cleaner (P#20520).*
- 7. Specify extra charcoal filters (P#30248).*
- Specify additional filter paper (P#65490)* or filter powder (P# 73275)*.
- Specify shipping method.
- 10. For export consult factory.
 - * Additional charges

Weights:

Shipping Weight:

599 lbs., (272 kg.)

Shipping Cube Size:

 $42" \times 30" \times 93" = 68 \text{ cu. ft.}$

 $1067 \text{ mm} \times 762 \text{ mm} \times 2363 \text{ mm} = 2 \text{ cu. meters}$