





Ventless Hood

Model OVH-10

- The compact and simple design of the ventless hood eliminates the need for expensive roof modifications and the hassle of dealing with multiple vendors supplying separate hood and electrical systems.
- Our one-of-a-kind stainless steel hood attaches directly on top of certain model electric ovens.

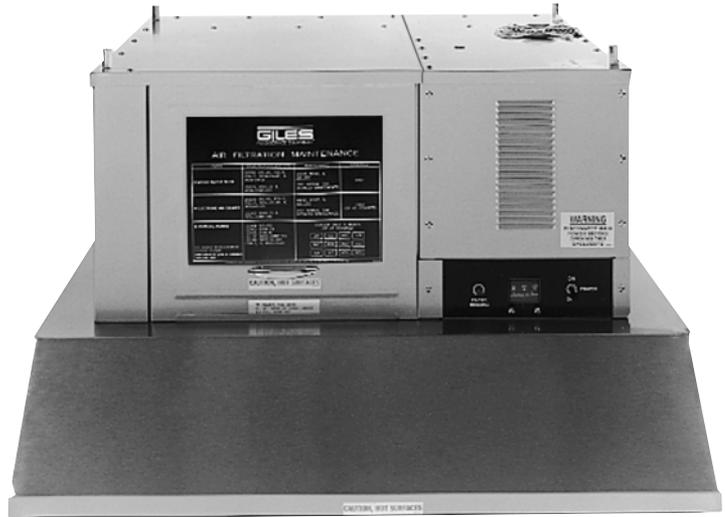

Standard Features

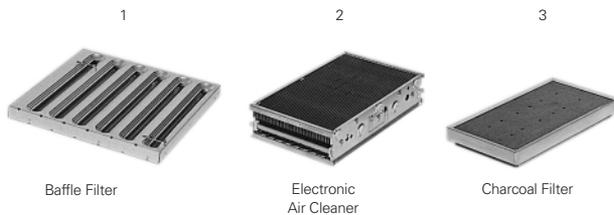

Ventless Hood System

The Ventless Hood consists of an Air Filtration System. The Air Filtration System operates in three steps:

- (1) Baffle Filter traps large grease particles;
- (2) Electronic Air Cleaner consists of an ionizer which charges particles of dirty air allowing them to be collected by an electrostatic force;
- (3) Charcoal Filter further entraps any particles which may have escaped the Electronic Air Cleaner, and the charcoal filter helps eliminate odors.



Giles Foodservice Equipment A Division of Giles Enterprises, Inc.


P.O. Box 210247 • 2750 Gunter Park Drive West • Montgomery, AL 36121-0247 USA

(334) 272-1457 • Fax (334) 272-3561 • Phone Toll Free 1-800-554-4537

Web Site: www.gilesent.com • Email: info@gilesent.com

Ventless Hood

Model OVH-10

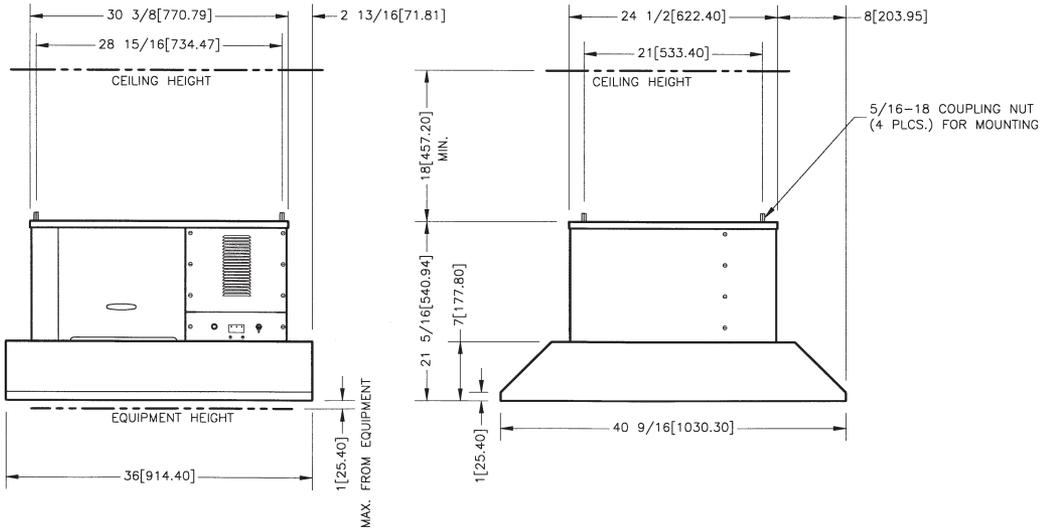

Inches (millimeters)

33806-A

Dimensions

Width: 36" 915 mm
 Depth: 40 9/16" 1031 mm
 Height: 21 5/16" 542 mm

*Dimensions may vary depending on oven.

Accessories

Soak Tank

Construction

18 gauge Stainless Steel

Electrical Specs.

Volts: 208/240 V
 Frequency: 50/60 Hz, AMPS: 2
 Single phase only, CE units supplied with cords
 Hood will control 1 or 3 phase external unit

Weight

Shipping Weight: 222 lbs. (10 kg.)
 Shipping Size: 48" x 46" x 33" = 43 cu. ft.
 (1219 x 1168 x 838 mm = 1.2 cu. meters)

Listings

UL, NSF, UL Canada.
 SBCCI # 94161
 BOCA # 94-34
 LA CTY # RR8110
 CFM 288-391

Bidding Specifications

Mfg. under patent #4902316

1. Specify as Model OVH-10.
2. Consult factory for list of approved ovens.
3. Specify voltage (208/240).
4. Specify extra Electronic Air Cleaner (P# 22360) for back up*.

5. Specify extra charcoal filter (P# 31963) for replacement*.
6. Ceiling mounted to factory specifications.

* Additional charges



P.O. Box 210247 • 2750 Gunter Park Drive West • Montgomery, AL 36121-0247 USA

334.272.1457 • Fax 334.272.3561 • Phone Toll Free 1.800.554.4537

Web Site: www.gilesent.com • Email: info@gilesent.com

We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements additions or replacements or previously purchased equipment.

Printed in U.S.A. 9/00 Form 65778-A